MA 285 D/S SL PLUS

The MA 285 D/S SL by Piazzetta is the One-piece Firebox with Vertically-sliding Door and Natural Convection for Wood Fireboxes that will ensure you low consumption, high efficiency and easy installation. Find out further information

GENERAL FEATURES

•Heating: natural convection, radiant and forced ventilation kit optional through Multifuoco System® or Multifuoco System Plus single or double, ducting
•Structure: coated steel with closed firebox
•Firebox: Aluker®
•Hearth: cast iron
•Hood: steel
•Opening: door in coated steel with self-cleaning ceramic glass resistant to 750°C. Openable with vertically-sliding system and door for cleaning
•Door profile: coated steel
•Handle: coated steel
•Primary air: manually adjustable
•Secondary air: pre-determined
•Flue gas adjustment: with manually adjustable valve
•Standard flue outlet position: top
•Fuel: wood

TECHNICAL DETAILS

•Energy efficiency class A (G → A++)
•Rated output max kW 13,0
•Rated efficiency power % 80,3
•Rated consumption max kg/h 4.0
•Vertically sliding opening cm 36
•Firebox opening (W) - Dimensions for the passage of wood mm 64
•Firebox opening (H) - Dimensions for the passage of wood mm 28,5
•Mouth of firebox (W) - Minimum dimensions of mouth of cladding cm 75,5
•Mouth of firebox (D) - Minimum dimensions of mouth of cladding cm 43
•Mouth of firebox (H) - Minimum dimensions of mouth of cladding cm 51,5
•Weight kg 215
•Weight kg 215
•Model MA 285 SL PLUS

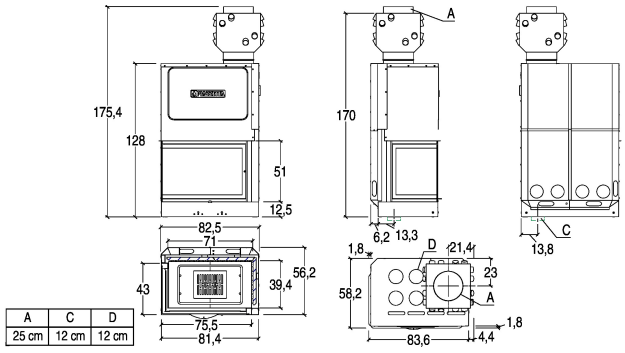

A	C	D
25 cm	12 cm	12 cm

PIAZZETTA
PASSIONE ACCESA